


User manual

SMX2, SMX5

1 – Electrical connections

Function	Colour	Farbe	Colore
A	Yellow	Gelb	Giallo
/A	Orange	Orange	Arancio
B	Green	Grün	Verde
/B	Brown	Braun	Marrone
+Vdc	Red	Rot	Rosso
0Vdc	Black	Schwarz	Nero


2 – Output signals

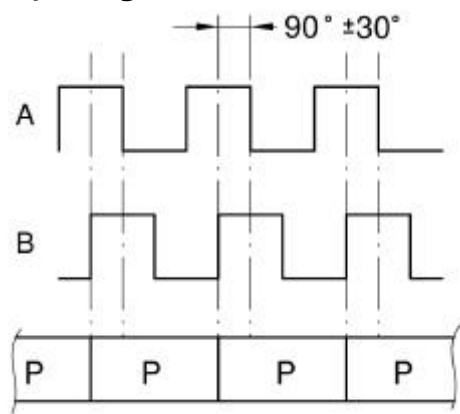

2.1 Electrical specifications

Resolution:	SMX2 = 2 mm SMX5 = 5 mm
Output frequency:	7.5 kHz max.
Power supply:	+5V ÷ 30V
Output circuit:	PP/LD universal circuit
Output signals:	A, /A, B, /B
Output current (per channel):	40 mA max.
Input current:	50 mA max.

3 – Mounting on circular surface

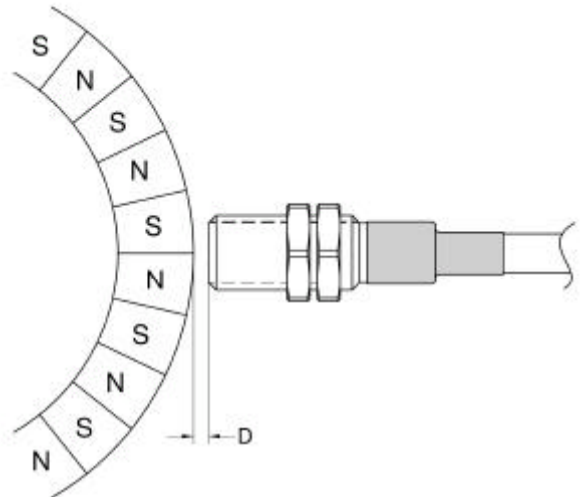

Sensor	Gap Sensor/Magnetic ring (D)
SMX2	0,1 ÷ 2 mm
SMX5	0,1 ÷ 3 mm

4 – Dimensional drawing

