


LINEPULS

OEM battery display with SM25 magnetic sensor

series

LD111

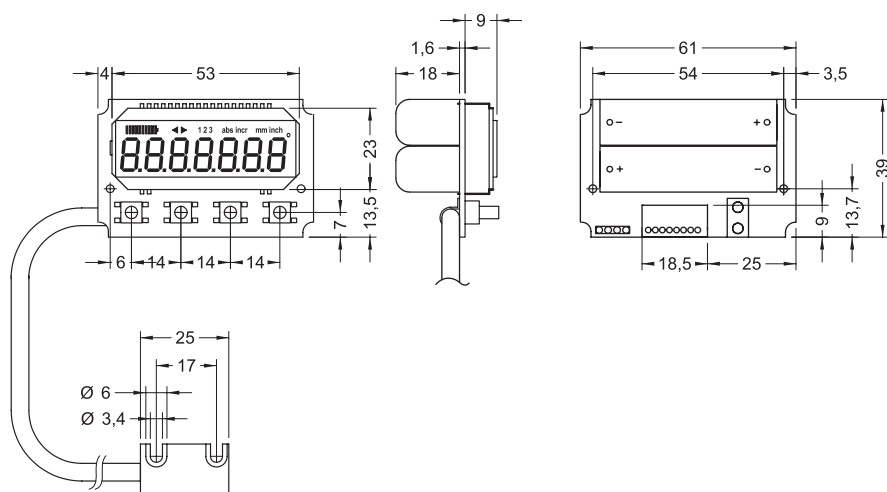

LD111

- Quasi-absolute battery powered display
- Ultracompact OEM version
- Connected sensor
- Mm-inch-degree mode
- Resolution up to 0.01 mm

PARAMETERS

3 Offset values, preset, resolution, mm/inch, angular display mode

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: $0^{\circ}\text{C} \div +50^{\circ}\text{C}$ ($+32^{\circ}\text{F}$, $+122^{\circ}\text{F}$)
Storage temperature range: $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ (-4°F , $+176^{\circ}\text{F}$)
Protection: IP00

MECHANICAL SPECIFICATIONS

Dimensions: $61 \times 39 \times 25$ mm
Cable length: 5 m max.
Display: LCD (-999999 ÷ 999999)

ELECTRICAL SPECIFICATIONS

Power supply: 2 battery 1,5 V
Consumption: $\sim 220 \mu\text{A}$
Measurement speed: < 5 m/s max.

ACCESSORIES

MT25: Magnetic tape

ORDERING CODE

