


Serie Sliding

SR329SU

Nylon Sliding Cable Chain with opening frames

Inner height (D) 75,5 mm

Strong double share Sideband & Frame construction with large anti-friction triple-pin. The chain incorporates large sliding-skid surfaces to offer durability, even with high speed/loads. Frames are opening from inner radius or outer radius. Vertical separators are available

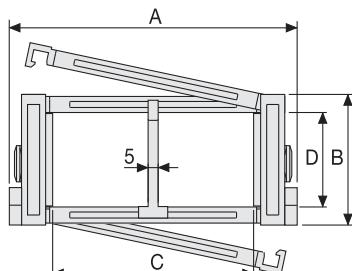


Technical characteristics

3

Speed	3 m/s
Acceleration	13 m/s ²

For higher requirements please consult our technical dept.

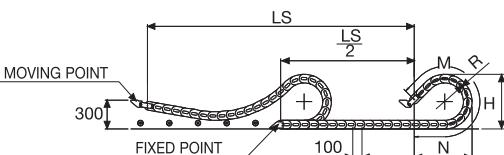

Length of chain (L)

Half travel distance ($\frac{LS}{2}$)
plus length of curve (M)

$$L = \frac{LS}{2} + M$$

A mm	B mm	C mm	D mm	R mm	Weight/m kg	Chain Part Number
128	107	64	75,5	150-200-250-300-350-400-500-600	4,19	SR329SU064 □□□*
148	107	84	75,5	150-200-250-300-350-400-500-600	4,25	SR329SU084 □□□*
173	107	109	75,5	150-200-250-300-350-400-500-600	4,33	SR329SU109 □□□*
180	107	116	75,5	150-200-250-300-350-400-500-600	4,36	SR329SU116 □□□*
203	107	139	75,5	150-200-250-300-350-400-500-600	4,43	SR329SU139 □□□*
243	107	179	75,5	150-200-250-300-350-400-500-600	4,56	SR329SU179 □□□*
278	107	214	75,5	150-200-250-300-350-400-500-600	4,67	SR329SU214 □□□*
304	107	240	75,5	150-200-250-300-350-400-500-600	4,76	SR329SU240 □□□*
328	107	264	75,5	150-200-250-300-350-400-500-600	4,83	SR329SU264 □□□*
354	107	290	75,5	150-200-250-300-350-400-500-600	4,91	SR329SU290 □□□*
378	107	314	75,5	150-200-250-300-350-400-500-600	4,99	SR329SU314 □□□*
404	107	340	75,5	150-200-250-300-350-400-500-600	5,06	SR329SU340 □□□*
428	107	364	75,5	150-200-250-300-350-400-500-600	5,15	SR329SU364 □□□*
483	107	419	75,5	150-200-250-300-350-400-500-600	5,36	SR329SU419 □□□*
552	107	488	75,5	150-200-250-300-350-400-500-600	5,57	SR329SU488 □□□*

*Complete the code by inserting the value of the radius (R): Ex. SR329SU116 □□□

Chain equipped with nylon frame every pitch: complete the code by inserting the letter D.

Ex. SR329SU116250 □

R mm	H mm	N mm	M mm
150	406	415	905
200	506	595	1345
250	606	765	1780
300	706	940	2220
350	806	1110	2655
400	906	1280	3095
500	1106	1625	3970
600	1306	1965	4845



End Brackets

The end brackets set allows the two ends of the chain to be attached to the equipment. One set includes two pivoting end brackets to be installed at the moving point and two standard steel end brackets to be installed at the fixed point.

Bright Zinc Plated Steel Movable Type*** (moving point)

Bright Zinc Plated Steel Type*** (fixed point)


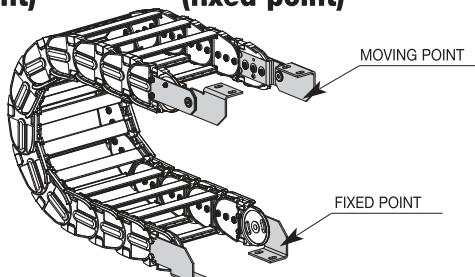


Fig. A
Chain fixed outside the radius. (Fig A)

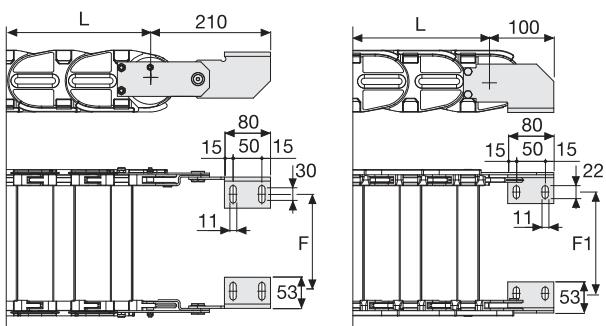

Chain Type	F mm
SR329SU064	40
SR329SU084	60
SR329SU109	85
SR329SU116	92
SR329SU139	115
SR329SU179	155
SR329SU214	190
SR329SU240	216
SR329SU264	240
SR329SU290	266
SR329SU314	290
SR329SU340	316
SR329SU364	340
SR329SU419	395
SR329SU488	464

Chain Type	F1 mm
SR329SU064	51
SR329SU084	71
SR329SU109	96
SR329SU116	103
SR329SU139	126
SR329SU179	166
SR329SU214	201
SR329SU240	227
SR329SU264	251
SR329SU290	277
SR329SU314	301
SR329SU340	327
SR329SU364	351
SR329SU419	406
SR329SU488	475

Bright Zinc Plated Steel Type Part Numbers

Complete Set Assembled	
Chain Type	End Brackets Set
SR329SU..	A329SU□□□*KM
Complete Set Unassembled	

Chain Type	End Brackets Set
SR329SU..	A329SU□□□*K

* Inner width (C)


*** Available on request in stainless steel

Serie Sliding

SR329SU

Nylon Sliding Cable
Chain with opening
frames

3



How to open the cover

For further information please
consult Brevetti Stendalto's
Technical Office