


Miniature Metal Bellows Coupling

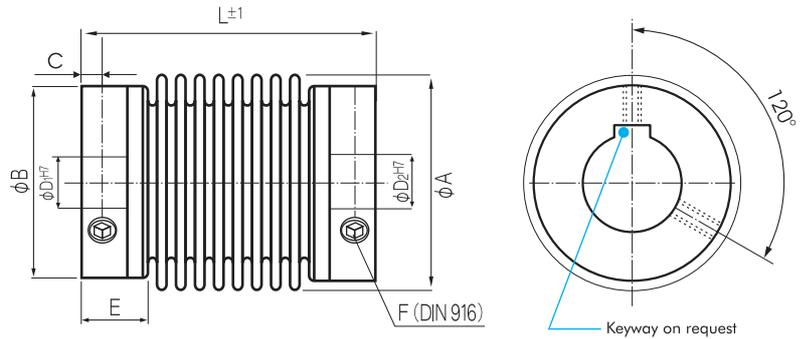

Order Code: KB 1 / 45 - 40 - 10 - 18 - S

Type / Size Length L Ø D1 Ø D2 Options

	Torque T _{KN} (Nm)	Dimensions (mm)							Technical Ratings							
		L	Ø A	D1/D2	Ø B	C	E	F	Mass (g)	Moment of Inertia J (g cm ²)	Spring Stiffness			Misalignment		
		Length (±1)	Outer Ø	Bohre Sizes (H7) min ~ max	Hub Ø		Hub- Length	Screw (DIN 916) T _A (Nm)			torsinal C _T (Nm/rad)	radial C _R (N/mm)	axial C _A (N/mm)	radial ΔK _r (mm)	axial ΔK _a (mm)	angular ΔK _w (°)
KB1/1	0.1	23	10	1-4	10	2	6	M3 0.5	3	0.45	65	10	14	0.12	0.2	1.2
KB1/5	0.5	19	15	3-8	13.5	2	6	M3	4	1.3	260	43	13	0.1	0.2	1
		0.5						4.5	1.5	200	18	10	0.15	0.3	1.5	
		0.5						5	1.6	160	9	8	0.2	0.4	2	
KB1/10	1	21	15	3-8	13.5	2	6	M3	5.5	1.8	510	74	27	0.1	0.2	1
		0.5						6	2	380	31	20	0.15	0.3	1.5	
		0.5						7	2.3	310	16	16	0.2	0.4	2	
KB1/15	1.5	26	19	3-12	19	3	8	M4	10	6	750	59	15	0.1	0.3	1.5
		0.5						12	7.4	700	20	9	0.15	0.4	2	
KB1/20	2	22	24	3-14	21.5	3	6	M4	11	9.2	1500	67	12	0.15	0.3	1.5
		0.5						13	12.6	1300	21	11	0.2	0.4	1.5	
		0.5						15	13.5	1050	11	9	0.25	0.5	2	
KB1/45	4.5	40	32	6-18	29	4	12	M6	44	68	6500	168	32	0.1	0.3	1.5
		0.5						3	50	79	4200	41	20	0.2	0.5	2
KB1/100	10	45	40	6-24	36	4	12	M6	60	150	8100	120	27	0.15	0.4	1.5
		0.5						3	79	210	6800	29	17	0.3	0.6	2

- ⊙ Speed: max. 15000 min⁻¹
- ⊙ Hub: Bore Tolerance: H7 Keyway acc. DIN 6885 optional
- ⊙ Material: Bellows - Stainless Steel
Hub - Aluminium (also available in Stainless Steel)
- ⊙ Temperature Range: -30° ~ 120° C

