

**SL2**

# WITH CLAMPING HUBS

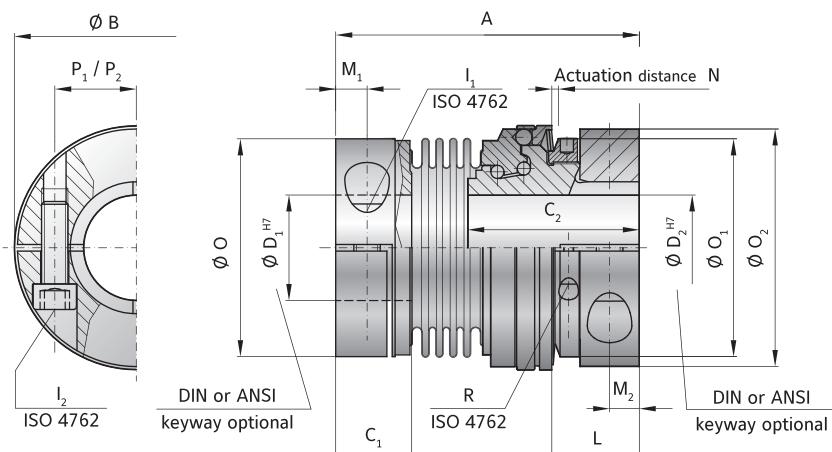
10 - 400 Nm

**LEICHTBAUWEISE****ABOUT****DESIGN**

Clamping collar / clamping hub with one clamping screw each. Clutch system: spring loaded ball-detent principle. Special compact, high stiffness version. Operable temperature range from -30 to +100° C.

**AVAILABLE FUNCTION SYSTEMS**

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement

**MODEL SL2**

SIZE	30	60	150	300	
Adjustment range* from - to (Nm)	T <sub>KN</sub>	10-35 30-80	20-50 40-100	40-100 100-200	100-250 200-350 300-400
Overall length (mm)	A	80	93	112	126
Actuation ring diameter (mm)	B	63	74	92	118
Hub length (mm)	C <sub>1</sub> /C <sub>2</sub>	21/45	23/53	28 / 63	34/72
Bore diameter from Ø to Ø H7 (mm)	D <sub>1</sub> /D <sub>2</sub>	12-32/12-30	16-35 / 16-35	19-42 / 19-42	22-60 / 22-60
Screw ISO 4762 (mm)	I <sub>1</sub> /I <sub>2</sub>	M6	M8	M10	M12
Tightening torque (Nm)		15	40	75	130
Distance to actuation ring edge (mm)	L	22	26	32	35
Distance (mm)	M <sub>1</sub> /M <sub>2</sub>	7.5/7.5	9.5/9	11/11	13/12
Actuation distance (mm)	N	1.3	1.5	1.8	2
Ø Clamping hub Ø, (coupling end) (mm)	O	55.5	66	82	110
Ø Adjustment nut (mm)	O <sub>1</sub>	55	66	82	100
Clamping ring Ø, (torque limiter end) (mm)	O <sub>2</sub>	59	72	90	112
Distance between centers, bellows side/safety element (mm)	P <sub>1</sub> /P <sub>2</sub>	20/21.5	23 / 25	27/33	39/41
Adjustment nut's clamp screw ISO 4762	R	M3	M3	M3	M4
Tightening torque (Nm)		2	2	2	4.5
Approx. weight (kg)		0.4	0.7	1.2	2.8
Approx. moment of inertia at D max.(10 <sup>-3</sup> Kgm <sup>2</sup> )	J <sub>ges</sub>	0.2	0.8	1.4	6.2
Torsional stiffness (10 <sup>3</sup> Nm/rad)		31	72	141	157
Lateral ± max. (mm)		0.2	0.2	0.2	0.25

\*Maximum transmittable torque of the clamping hub depends on the bore diameter / see table on page 96

ORDERING EXAMPLE	SL2   SK2	60	W	30	20	80	40-100	XX
Model	●							
Size		●						
Function system			●					
Bore D1 H7				●				
Bore D2 H7					●			
Disengagement torque Nm						●		
Torque adjustment range Nm							●	

Special designation only (e.g. special bore / keyway dimensions).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. SL2 / 60 / W / 30 / 20 / 80 / 40-100; XX=special dual keyway)